



# HMT LED

## Digital clock 25 cm

### Overall presentation:

- ▶ Indoor or outdoor clocks available in various sizes and colours. High brightness LED.
- ▶ LED colour available: red, white or yellow (blue or green in option).
- ▶ Setting by control pad (2 keys inside the clock) or by wireless remote control 433MHz (option).
- ▶ Optional radio synchronisation: France Inter, DCF or GPS antenna (absolute time accuracy)
- ▶ Optional time distribution: AFNOR, DHF, NTP or PC.
- ▶ Single or double sided display.



### Power supply:


- ▶ Power supply 115V / 230V +/-6% 50/60HZ.
- ▶ Rated current: 0,5A / 0,25A (single-sided) and 0,6A / 0,35A (double-sided).

### Display :

- ▶ Digit size: 25 cm. Readability: 120m.
- ▶ Display of time, date and temperature, counting / countdown, rate of chlorine (manual), rate of humidity (manual). Fix or alternate.
- ▶ Automatic setting of luminosity according to light exposure (sun, cloud or night).
- ▶ Setting of alternation duration (2 to 6 seconds).
- ▶ Time display: 12h or 24 h mode. Automatic summer/winter time changeover.
- ▶ Temperature in Celsius (°C) or Fahrenheit (°F).
- ▶ Display test menu.

### Mechanical:

- ▶ Black aluminium casing. Antiglare protection glass. IP54 / IK07.
- ▶ Tropicalized electronic cards.
- ▶ Wall mounted or optional bracket.
- ▶ Weight: 9 Kg each side.

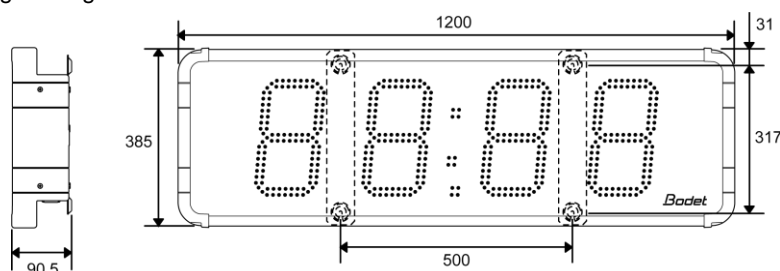

### Environment:

- ▶ Operating temperature: -20°C to +50°C.
- ▶ Humidity : 93 % at +40°C.


### References :

- ▶ HMT LED 25 cm
- ▶ HMT LED 25 cm slave display
- ▶ Wireless remote control
- ▶ Temperature probe (with 5m cable)
- ▶ Double-sided bracket HMT LED 25 cm

939341  
939249  
939040  
935011  
939032



Wireless remote control



Bracket



Ref.: 643981 C